

DANIEL[®] CORIOLIS MASS FLOW METER PRODUCT GUIDE

ADVANCED MASS METERING TECHNOLOGY



DANIEL[®]
Decades Proven. Field Chosen.[™]

TYPICAL APPLICATIONS

- Custody Transfer
- Reactor Feed Ratio
- Control
- Density
- Measurement
- Batch Control

INDUSTRIES

- Chemicals
- Minerals
- Oil & Gas
- Power Generation
- Water

INTRODUCTION

The **Daniel® Coriolis Mass Flow Meter** delivers best-in-class performance for **mass flow, density, and temperature measurement**, while also calculating **volume flow, total flow, and fluid composition in real-time**.


The meter is available in two sensor styles:

- **M-type Coriolis**
- **S-type Coriolis**

Each sensor type is offered in both **compact and remote configurations** to suit different installation requirements. A typical mass flow meter consists of a **flow sensor** and a **signal transmitter**.

- The **flow sensor** contains two vibrating flow tubes that generate signals detected by pickoff sensors.
- The **signal transmitter** uses **Digital Signal Processing (DSP)** and a **Dynamic Vibration Balance (DVB) circuit** to ensure **fast response** and **high accuracy**.

Field diagnostics, configuration, and data recording can be easily managed via **HART** or **Modbus RTU communication**.

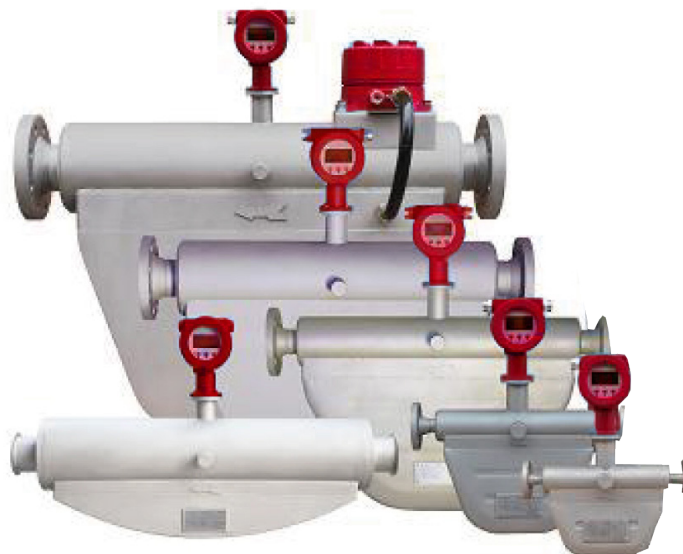

KEY FEATURES

- No moving parts for enhanced durability and longer service life.
- Customizable flow connectors and installation lengths.
- Excellent repeatability ($\pm 0.05\%$ of flow rate)
- Optional **Net Oil** functionality.
- NIST Traceable and NTEP Certified for custody transfer.

KEY BENEFITS

- Increased productivity with reduced maintenance.
- Lower installation costs.
- Improved product quality.
- Simplified **Net Oil** measurement without requiring a PLC or RTU.

CONSTRUCTION MATERIALS

- **Tubes:** SS316L (Hastelloy C optional).
- **Flow Splitter:** SS304 (SS316L and Hastelloy C optional).
- **Flanges:** SS304 (SS316L and Hastelloy C optional).
- **Housing Case (Non-Wetted Parts):** SS304 (SS316L optional).
- **Compliance:** NACE MR 0175/0103 compliant.

CERTIFICATES



Class 1 Division 1
Groups B, C, and D



NTEP

APPLICATIONS

Daniel's mass flowmeter is designed to perform reliably in the most complex and challenging environments, handling liquid, gas, and slurry applications across multiple industries.

| APPLICATION | | |
|---------------------|--|--|
| Process Fluids | Typical Applications | Industries |
| Liquid, Gas, Slurry | <ul style="list-style-type: none"> • Custody Transfer • Reactor Feed Ratio • Density Measurement • Batch Control | <ul style="list-style-type: none"> • Chemicals • Machinery • Minerals • Oil & Gas • Power Generation • Water |

APPLICATION



MEASUREMENT PRINCIPLE

The **Daniel® Coriolis Mass Flow Meter** operates using two parallel flow tubes vibrating at their **resonant frequency**. As fluid flows through the tubes, **Coriolis forces** cause slight deformation, detected by sensors.

- The **phase shift** between tube oscillations is proportional to **mass flow rate**.
- The **resonant frequency change** allows for **density measurement**.
- Integrated temperature sensors provide real-time **temperature compensation** for maximum accuracy.



TECHNICAL SPECIFICATIONS

FLOW RATE:


- **Mass Flow Rate (Max):** 3,307,000 lb/h (1,500,000 kg/h)
- **Volumetric Flow Rate (Max):** 6,604 GPM | 9,434 BPD | 1,500,000 L/h

PRESSURE:

- **Maximum Pressure:** 3,705 PSI (26 MPa) | Optional: 5,800 PSI (40 MPa)


ACCURACY FOR LIQUIDS:

(FIVE-POINT CALIBRATION, BASIC ACCURACY: ± 0.1 %)

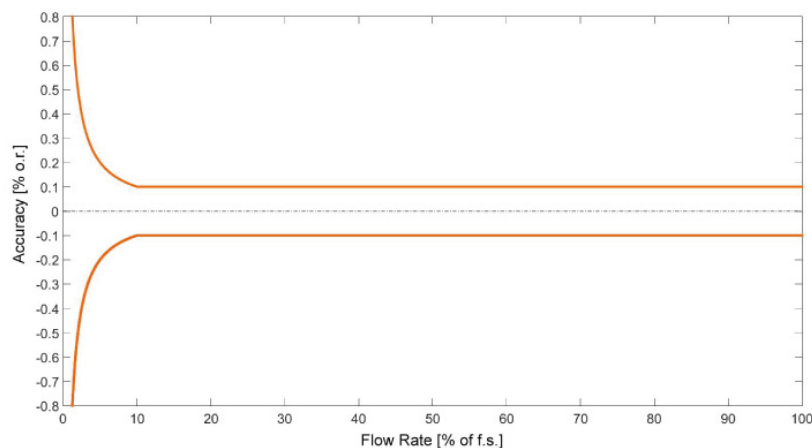

ACCURACY FOR GAS:

(FIVE-POINT CALIBRATION, BASIC ACCURACY: ± 0.5 %)

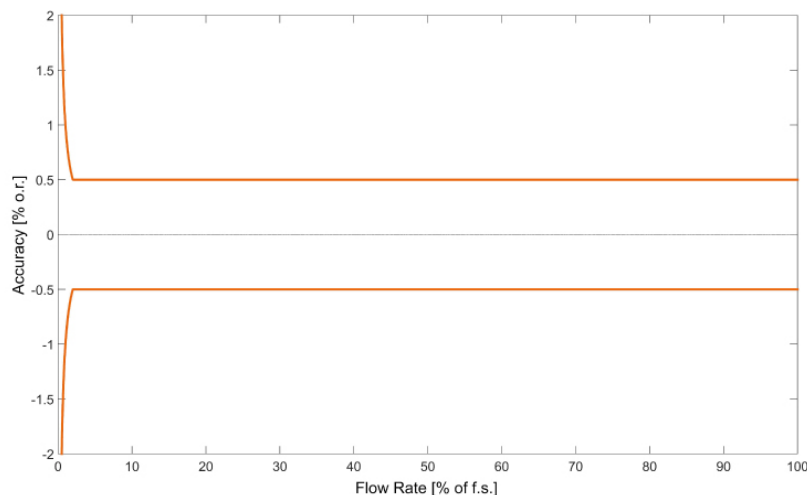

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

| 0.1% | 0.2% | 0.5% |
|--|--|--|
| $\pm 0.1\% \pm \left(\frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$ | $\pm 0.2\% \pm \left(\frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$ | $\pm 0.5\% \pm \left(\frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$ |
| Accuracy is calculated based on the water measurement under the condition of +20°C ~ 25°C and 0.1 MPa ~ 0.2 MPa. | | |

ACCURACY (LIQUIDS)

| | |
|---|---|
| Basic Accuracy (Mass flow) ² : | ±0.1%, ±0.2% or ±0.5% |
| Mass Flow Repeatability: | ± 0.05% (for 0.1% accuracy), ± 0.1% (for 0.2% accuracy) or ±0.25% (for 0.5% accuracy) |
| Basic Accuracy (Volume flow) ² : | ±0.4 % (option: up to ±0.15 %) of flow rate |
| Repeatability (Volume Flow): | ±0.05 %, ±0.1 % |
| Zero Stability: | ±0.01 % of full scale |

ACCURACY (GASES)

| | |
|---|--|
| Basic Accuracy (Mass flow) ² : | ±1% (option: up to ±0.5 %) of flow rate |
| Mass Flow Repeatability: | ±0.25 % of flow rate |
| DENSITY | |
| Density Range: | up to 2500 kg/m ³ , 2.5 g/cm ³ |
| Density Accuracy: ² | ±1.0 kg/m ³ , ±0.001 g/cm ³ |
| Density Repeatability: | ±0.5 kg/m ³ , ±0.0005 g/cm ³ |
| TEMPERATURE | |
| Process Temperature Range: | -50°C to +200°C (-58°F to 392°F) |
| Option: | -50°C to +350°C (-58°F to 662°F) |
| Temperature Accuracy: | ±1 °C ±0.5 % of reading (±1.8 °F ± 0.5% of reading) |
| Temperature Repeatability: | ±0.2 °C (±0.36 °F) |
| Ambient Temperature | -40 to 131°F (-40 to +55°C) |
| Output | 4-20 mA and Pulse/Frequency , Optional: HART or Modbus RS485 Pulse Output: 0 to 10 kHz, 0.001%F.S; Current Output: 4 to 20mA, 0.005%F.S |
| Electronics | Direct Mount or Remote Mount |
| Graphic Display | OLED |
| Operating Elements | 3 optical keys for operator |
| Electromagnetic compatibility | Criteria A, complied with IEC 61000-4-2 |
| Power Supply | 85 to 265 VAC, 18 to 36 VDC |
| IP | Standard IP65, IP67 for options |

- Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
- The specifications refer to standard conditions (for further information see Series Manual).

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

FLOW RANGE

FLOW RANGE FOR LIQUIDS (METRIC UNIT IN KG/HR)

Model: Daniel® M-Type Micro Bend Coriolis

Size: from 1/8 to 10 inches

FLOW RANGE FOR LIQUIDS (METRIC UNITS IN KG/HR) TABLE 1.1

| Size(inch) | Full flow range, kg/hr | Accuracy flow range, kg/hr | | Zero stability, kg/hr |
|------------|------------------------|----------------------------|---------------------|-----------------------|
| | | +/-0.1% | +/-0.2% and +/-0.5% | |
| 1/8" | 1.2–120 | 10–120 | 6–120 | 0.004 |
| 3/8" | 10 – 1,000 | 100 – 1,000 | 50 – 1,000 | 0.045 |
| 1/2" | 20 – 3,000 | 300 – 3,000 | 150 – 3,000 | 0.09 |
| 1" | 80 – 8,000 | 600 – 8,000 | 300 – 8,000 | 0.25 |
| 1 ½" | 240 – 32,000 | 2,400 – 32,000 | 1,000 – 32,000 | 1 |
| 2" | 500 – 50,000 | 5,000 – 50,000 | 2,000 – 50,000 | 2 |
| 3" | 800 – 120,000 | 10,000 – 120,000 | 6,000 – 120,000 | 3.5 |
| 4" | 1,500 – 200,000 | 20,000 – 200,000 | 10,000 – 200,000 | 7 |
| 6" | 5,000 – 500,000 | 50,000 – 500,000 | 30,000 – 500,000 | 23 |
| 8" | 10,000 – 1,000,000 | 70,000 – 1,000,000 | 50,000 – 1,000,000 | 45 |
| 10" | 15,000 – 1,500,000 | 150,000 – 1,500,000 | 75,000 – 1,500,000 | 70 |

FLOW RANGE FOR LIQUIDS (US UNIT IN LB/HR)

Model: Daniel® M-Type Micro Bend Coriolis


Size: from 1/8 to 10 inches

FLOW RANGE FOR LIQUIDS (US UNITS IN LB/HR) TABLE 1.2

| Size(inch) | Full flow range, lb/hr | Accuracy flow range, lb/hr | | Zero stability, lb/hr |
|------------|------------------------|----------------------------|---------------------|-----------------------|
| | | +/-0.1% | +/-0.2% and +/-0.5% | |
| 1/8" | 2 – 265 | 22 – 265 | 13 – 265 | 0.0088 |
| 3/8" | 22 – 2,204 | 220.40 – 2,204 | 110 – 2,204 | 0.099 |
| 1/2" | 44 – 6,613 | 661.30 – 6,613 | 330 – 6,613 | 0.2 |
| 1" | 176 – 17,636 | 1322 – 17,636 | 661 – 17,636 | 0.55 |
| 1 ½" | 529 – 52,910 | 5,291 – 52,910 | 2,204 – 52,910 | 2.2 |
| 2" | 1,102 – 110,231 | 11,023 – 110,231 | 4,409 – 110,231 | 4.41 |
| 3" | 1,767 – 264,555 | 22,046 – 264,555 | 13,227 – 264,555 | 7.72 |
| 4" | 3306 – 440,925 | 44,092 – 440,925 | 22,046 – 440,925 | 15.43 |
| 6" | 11,023 – 1,102,311 | 110,231 – 1,102,311 | 6,6138 – 1,102,311 | 50.71 |
| 8" | 22,046 – 2,204,622 | 220,462 – 2,204,622 | 110,231 – 2,204,622 | 99.21 |
| 10" | 33,069 – 3,307,000 | 330,693 – 3,307,000 | 165,346 – 3,307,000 | 154.32 |

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

M-TYPE CORIOLIS INSTALLATION DIMENSIONS (A.2.1 AND A.2.2)

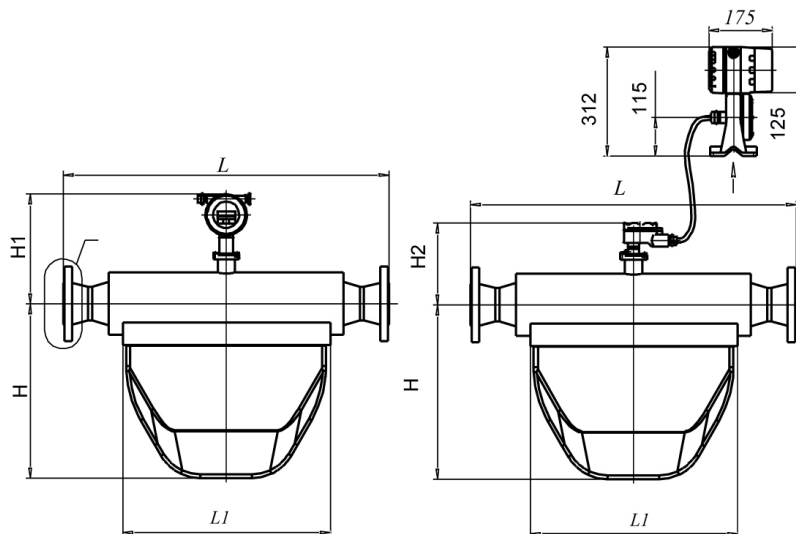

Compact version - Figure A.2.1 (Daniel® - M-Type)

Remote version - Figure A.2.2 (Daniel® - M Type)


TABLE 1.3 – OUTLINE DIMENSIONS AND WEIGHTS

| Process connection size | L, in MM | | L1, in mm | H, in mm | H1, in mm | H2, in mm | Cmax, in MM* | Weight, lb KG | |
|-------------------------|---------------|-----------------|---------------|---------------|--------------|--------------|--------------|----------------|----------------|
| | ≤300# (4 MPa) | ≥600# (6.3 MPa) | | | | | | A.2.1 | A.2.2 |
| 1/8" (Dn3mm) | 12.64 321 | 13.58 345 | 88.98 2260 | 4.53 115 | 9.84 250 | 6.69 170 | 3.23 82 | 11.02 5 | 17.64 8 |
| 3/8" (Dn10mm) | 16.69 424 | 19.06 484 | 11.89 302 | 6.06 154 | 10.63 270 | 7.28 185 | 4.33 110 | 22.05 10 | 28.66 13 |
| ½" (Dn15mm) | 15.75 400 | 16.30 414 | 11.02 280 | 7.52 191 | 11.73 298 | 8.39 213 | 4.53 115 | 24.25 11 | 30.86 14 |
| 1" (Dn25mm) | 19.69 500 | 21.1 536 | 14.17 360 | 10.16 258 | 11.89 302 | 8.58 218 | 5.91 150 | 33.07 15 | 39.68 18 |
| 1 ½" (Dn40mm) | 23.62 600 | 24.96 634 | 18.11 460 | 12.05 306 | 12.4 315 | 9.06 230 | 6.5 165 | 61.73 28 | 68.34 31 |
| 2" (Dn50mm) | 31.5 800 | 31.6 828 | 25.2 640 | 16.14 410 | 12.8 325 | 9.45 240 | 8.07 205 | 105.82 48 | 112.44 51 |
| 3" (Dn80mm) | 35.43 900 | 36.54 928 | 27.56 700 | 19.49 495 | 13.78 350 | 10.43 265 | 16.38 416 | 213.85 97 | 220.46 100 |
| 4" (Dn100mm) | 44.49 1130 | 45.51 1156 | 33.86 860 | 26.18 665 | 14.57 370 | 11.22 285 | 17.32 440 | 586.43 266 | 593.04 269 |
| 6" (Dn150mm) | 57.09 1450 | 58.66 1490 | 47.24 1200 | 35.63 905 | 15.75 400 | 12.44 316 | 21.06 535 | 1014.13 460 | 1020.74 463 |
| 8" (Dn200mm) | 70.87 1800 | 72.64 1845 | 57.09 1450 | 46.25 1175 | 16.77 426 | 13.46 342 | 22.83 580 | 1146.4 520 | 1153.02 523 |
| 10" (Dn250) | 77.4 1966 | 78.98 2006 | 60.24 1530 | 51.18 1300 | 18.43 468 | 15.08 383 | 23.62 600 | 1278.68 580 | 1285.29 583 |

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.



Compact version - Figure A.3.1 (Daniel® S Type)

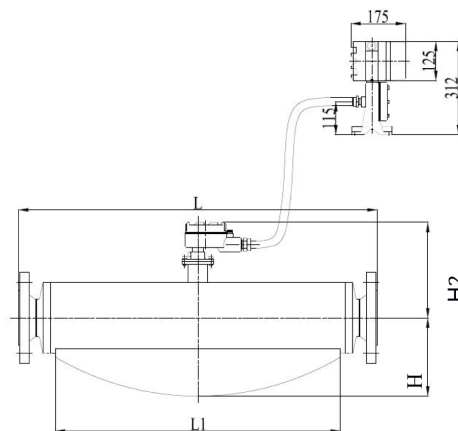


Remove version - Figure A.3.2 (Daniel® S Type)

TABLE 1.4 – OUTLINE DIMENSIONS AND WEIGHTS

| size | L, in MM | | L1, in mm | H, in mm | H1, in mm | H2, in mm | Cmax, in MM* | Weight,lb KG |
|-------------|------------------|--------------------|-----------------|----------------|-----------------|-----------------|--------------------|-----------------|
| | ≤300# (4 MPA) | ≥600# (6.3 MPA) | | | | | | A.3.1 A3.2 |
| 2" (Dn50mm) | 31.5 800 | 32.83 834 | 23.15 588 | 7.87 200 | 12.99 330 | 9.84 250 | 8.07 205 | 103.62 47 |
| 3" (Dn80mm) | 36.81 935 | 38.31 973 | 28.74 730 | 7.87 200 | 13.98 355 | 10.63 270 | 16.38 416 | 176.37 80 |

REMOTE TRANSMITTER INSTALLATION DIMENSIONS

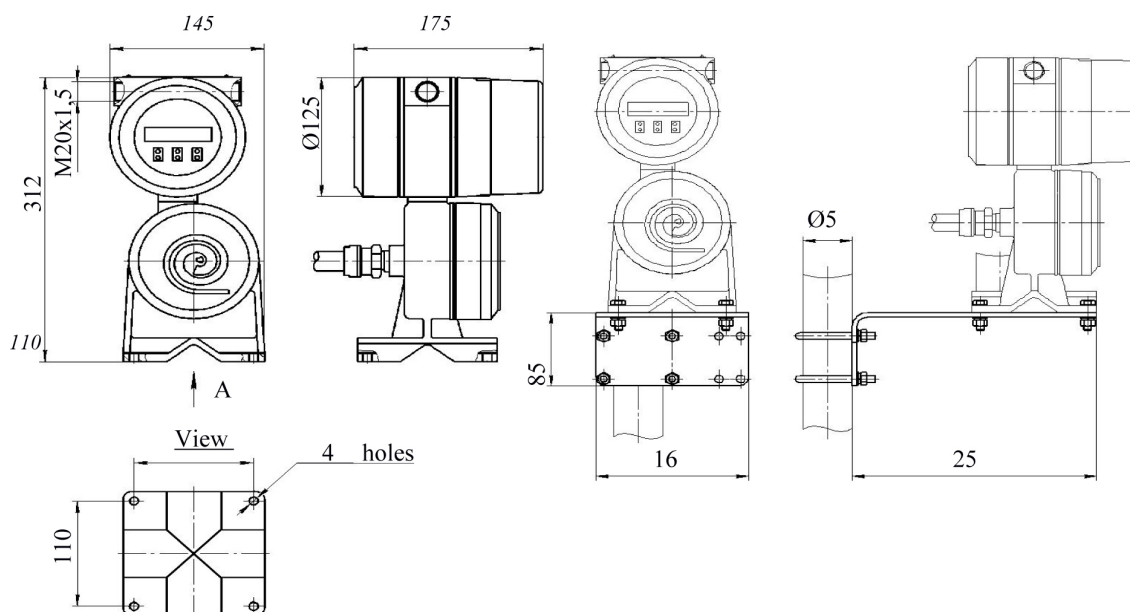

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

FIGURE A.4 OVERALL DIMENSIONS AND CONNECTION SIZE OF ELECTRONIC UNIT OF REMOTE TYPE

FIGURE A.5 BRACKET FOR FIXING REMOTE TYPE ELECTRONIC UNIT ON THE ASSEMBLY STAND

TRANSMITTER OPTIONS



- Direct Mount or Remote Mount
- OLED Display with 3 Optical Keys
- Power Supply: 85-265 VAC or 18-36 VDC
- Outputs: 4-20 mA & Pulse/Frequency
- Optional Communication: HART or Modbus RS485

AVAILABLE SENSOR TYPES

**M-Type Micro Bend Coriolis****Size from 1/8" to 10"**

The **M-Type Micro Bend Coriolis** features two V-shaped tubes housed in a casing with a significantly smaller radius compared to conventional U-shaped Coriolis sensors. This compact design reduces pressure loss and provides a space-saving installation footprint, making it ideal for applications where low-pressure drop and minimal space are critical.

**S-Type Super Bend Coriolis****Size: 2" to 3"**

The **S-Type Super Bend Coriolis** features two tubes with reduced curvature, resulting in a significantly smaller radius compared to conventional M-shaped Coriolis sensors. This compact design reduces installation space requirements, making it ideal for processes where footprint is a critical factor.

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

ORDERING CODES

Please provide the following information when placing your order:

| Ordering Model | Fluid Name | Flange Type | Temperature | Process Pressure |
|----------------|------------|-------------|-------------|------------------|
|----------------|------------|-------------|-------------|------------------|

MODEL SELECTION

| Daniel® Series Coriolis mass flow meter | | | | |
|---|----|---|-----------------------|--|
| COR | - | | | Description |
| 1/8" | 18 | | | Sensor Size |
| 3/8" | 38 | | | |
| 1/2" | 05 | | | |
| 1" | 01 | | | |
| 1 ½" | 15 | | | |
| 2" | 02 | | | |
| 2 ½" | 25 | | | |
| 3" | 03 | | | |
| 4" | 04 | | | |
| 6" | 06 | | | |
| 8" | 08 | | | |
| 10" | 10 | | | |
| M-Type Coriolis | | M | Size from 1/8" to 10" | |
| S-Type Coriolis | | S | Size from 1" to 4" | |
| Liquid | | L | Medium | |
| Gas | | G | | |
| DIN PN16 16 BAR MWP | | | D16 | Flange Rating / Maximum Working Pressure |
| DIN PN25 25 BAR MWP | | | D25 | |
| DIN PN40 40 BAR MWP | | | D40 | |
| DIN PN63 63 BAR MWP | | | D63 | |
| DIN PN100 100 BAR MWP | | | D10 | |
| DIN PN160 160 BAR MWP | | | D60 | |
| DIN PN250 250 BAR MWP | | | D50 | |
| ANSI 150#RF 285 PSI MWP | | | A15 | |
| ANSI 300#RF 740 PSI MWP | | | A30 | |
| ANSI 600#RF 1,480 PSI MWP | | | A60 | |
| ANSI 900#RF 2,220 PSI MWP | | | A90 | |
| ANSI 1500#RF 3,705 PSI MWP | | | A50 | |
| JIS 10K | | | 10K | |
| JIS 30K | | | 30K | |
| Sanitary fitting connection | | | SFC | |
| Customized connection | | | CSC | |

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

MODEL SELECTION (CONTINUED)

| Daniel® Series Coriolis mass flow meter | | | | | | | |
|--|-----|----|---|---|---|---|------------------|
| Compact version -58°F to +257°F (-50°C to +125°C) | COM | | | | | | Structures |
| Remote version -58°F to +392°F (-50°C to +200°C) | REM | | | | | | |
| Remote version -58°F to +572°F (-50°C to +300°C) | RXM | | | | | | |
| Not for hazardous application | | NX | | | | | Explosion Proof |
| DC18 to 36V | | | 1 | | | | Power Supply |
| AC85 to 265V | | | 2 | | | | |
| Modbus RTU(RS485) + one active 4-20mA + one active pulse/frequency, standard | | | | R | | | Signal Output |
| HART + one active 4-20mA + one active pulse/frequency | | | | H | | | |
| 2* active 4-20mA + active pulse | | | | S | | | |
| Modbus RTU(RS485) + 2* active 4-20mA + one active pulse/frequency | | | | D | | | |
| +/- 0.1% of RD | | | | | 1 | | Accuracy |
| +/- 0.2% of RD | | | | | 2 | | |
| +/- 0.5% of RD | | | | | 5 | | |
| Metric unit programming | | | | | | M | Software Version |
| US unit programming | | | | | | U | |

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

AGENCY CERTIFICATIONS FOR THE CORIOLIS

| AGENCY CERTIFICATIONS FOR AGENCY CERTIFICATIONS FOR CORIOLIS MASS FLOW METERS | | | |
|---|------------|---------------------------------------|----------------|
| Certification type | | Description | Certificate |
| Electrical | UL and CUL | Class 1 Division 1 Groups B, C, and D | E360841 vol. 1 |

With over 90 years of experience, Daniel is the only manufacturer that has the knowledge and experience to engineer and offer superior products that are trusted to provide the most reliable and accurate measurements in the global oil and gas industry.

Contact Us

Email: sales@Daniel.com

Phone: +1 (346) 509-3700

www.Daniel.com

