

# DANIEL<sup>®</sup>

## CORIOLIS MASS FLOW METER

### PRODUCT GUIDE

ADVANCED MASS METERING TECHNOLOGY



**DANIEL<sup>®</sup>**

Decades Proven. Field Chosen.<sup>™</sup>

## TYPICAL APPLICATIONS

- Custody Transfer
- Reactor Feed Ratio
- Control
- Density
- Measurement
- Batch Control

## INDUSTRIES

- Chemicals
- Minerals
- Oil & Gas
- Power Generation
- Water

## INTRODUCTION

The **Daniel® Coriolis Mass Flow Meter** delivers best-in-class performance for **mass flow, density, and temperature measurement**, while also calculating **volume flow, total flow, and fluid composition in real-time**.


The meter is available in two sensor styles:

- **M-Type Coriolis**
- **S-Type Coriolis**

Each sensor type is offered in both **compact and remote configurations** to suit different installation requirements. A typical mass flow meter consists of a **flow sensor** and a **signal transmitter**.

- The **flow sensor** contains two vibrating flow tubes that generate signals detected by pickoff sensors.
- The **signal transmitter** uses **Digital Signal Processing (DSP)** and a **Dynamic Vibration Balance (DVB) circuit** to ensure **fast response** and **high accuracy**.

Field diagnostics, configuration, and data recording can be easily managed via **HART** or **Modbus RTU communication**.

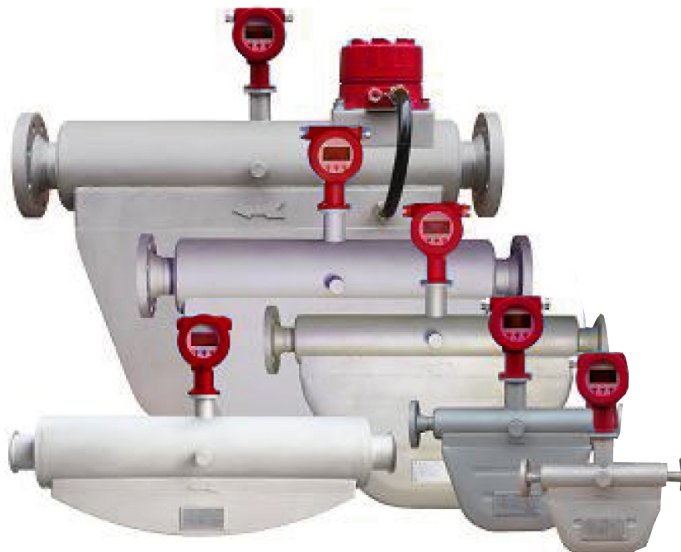

## KEY FEATURES

- No moving parts for enhanced durability and longer service life.
- Customizable flow connectors and installation lengths.
- Excellent repeatability ( $\pm 0.05\%$  of flow rate)
- Optional **Net Oil** functionality.
- NIST Traceable and NTEP Certified for custody transfer.

## KEY BENEFITS

- Increased productivity with reduced maintenance.
- Lower installation costs.
- Improved product quality.
- Simplified **Net Oil** measurement without requiring a PLC or RTU.

## CONSTRUCTION MATERIALS

- **Tubes:** SS316L (Hastelloy C optional).
- **Flow Splitter:** SS304 (SS316L and Hastelloy C optional).
- **Flanges:** SS304 (SS316L and Hastelloy C optional).
- **Housing Case (Non-Wetted Parts):** SS304 (SS316L optional).
- **Compliance:** NACE MR 0175/0103 compliant.

## CERTIFICATES



Class 1 Division 1  
Groups B, C, and D



National Type  
Evaluation Program

## APPLICATIONS

Daniel's mass flowmeter is designed to perform reliably in the most complex and challenging environments, handling liquid, gas, and slurry applications across multiple industries.

APPLICATION		
Process Fluids	Typical Applications	Industries
Liquid, Gas, Slurry	<ul style="list-style-type: none"> <li>• Custody Transfer</li> <li>• Reactor Feed Ratio</li> <li>• Density Measurement</li> <li>• Batch Control</li> </ul>	<ul style="list-style-type: none"> <li>• Chemicals</li> <li>• Machinery</li> <li>• Minerals</li> <li>• Oil &amp; Gas</li> <li>• Power Generation</li> <li>• Water</li> </ul>

### APPLICATION



## MEASUREMENT PRINCIPLE

The **Daniel® Coriolis Mass Flow Meter** operates using two parallel flow tubes vibrating at their **resonant frequency**. As fluid flows through the tubes, **Coriolis forces** cause slight deformation, detected by sensors.

- The **phase shift** between tube oscillations is proportional to **mass flow rate**.
- The **resonant frequency change** allows for **density measurement**.
- Integrated temperature sensors provide real-time **temperature compensation** for maximum accuracy.



## TECHNICAL SPECIFICATIONS

### FLOW RATE:


- **Mass Flow Rate (Max):** 3,307,000 lb/h (1,500,000 kg/h)
- **Volumetric Flow Rate (Max):** 6,604 GPM | 9,434 BPD | 1,500,000 L/h

### PRESSURE:

- **Maximum Pressure:** 3,705 PSI (26 MPa) | Optional: 5,800 PSI (40 MPa)


### ACCURACY FOR LIQUIDS:

(FIVE-POINT CALIBRATION, BASIC ACCURACY:  $\pm 0.1$  %)

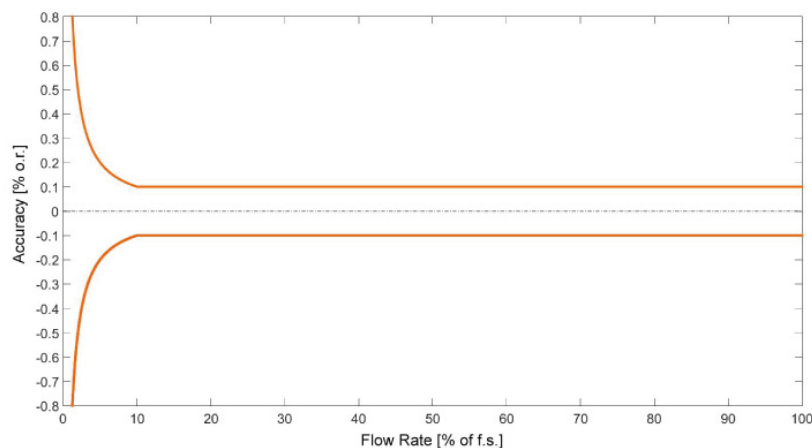

### ACCURACY FOR GAS:

(FIVE-POINT CALIBRATION, BASIC ACCURACY:  $\pm 0.5$  %)

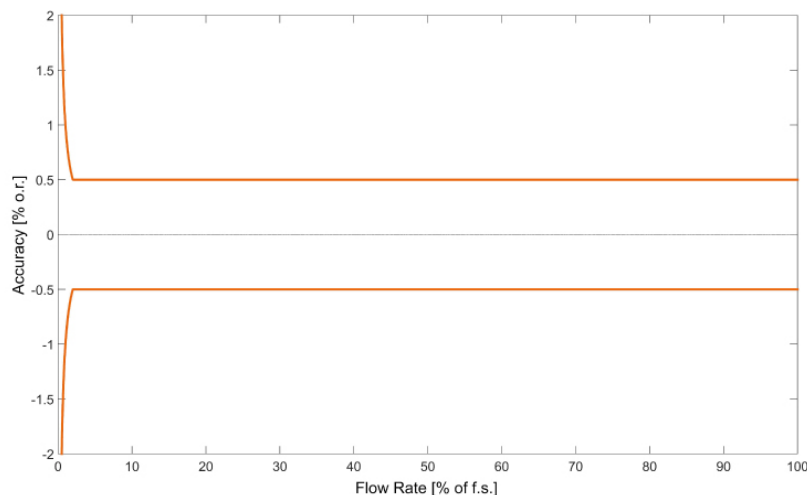

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

0.1%	0.2%	0.5%
$\pm 0.1\% \pm \left( \frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$	$\pm 0.2\% \pm \left( \frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$	$\pm 0.5\% \pm \left( \frac{\text{Stability of Zero Point}}{\text{Instantaneous Flow}} \times 100\% \right)$
Accuracy is calculated based on the water measurement under the condition of +20°C ~ 25°C and 0.1 MPa ~ 0.2 MPa.		

**ACCURACY (LIQUIDS)**

Basic Accuracy (Mass flow) <sup>2</sup> :	±0.1%, ±0.2% or ±0.5%
Mass Flow Repeatability:	± 0.05% (for 0.1% accuracy), ± 0.1% (for 0.2% accuracy) or ±0.25% (for 0.5% accuracy)
Basic Accuracy (Volume flow) <sup>2</sup> :	±0.4 % (option: up to ±0.15 %) of flow rate
Repeatability (Volume Flow):	±0.05 %, ±0.1 %
Zero Stability:	±0.01 % of full scale

**ACCURACY (GASES)**

Basic Accuracy (Mass flow) <sup>2</sup> :	±1% (option: up to ±0.5 %) of flow rate
Mass Flow Repeatability:	±0.25 % of flow rate
<b>DENSITY</b>	
Density Range:	up to 2500 kg/m³, 2.5 g/cm³
Density Accuracy: <sup>2</sup>	±1.0 kg/m³, ±0.001 g/cm³
Density Repeatability:	±0.5 kg/m³, ±0.0005 g/cm³
<b>TEMPERATURE</b>	
Process Temperature Range:	-50°C to +200°C (-58°F to 392°F)
Option:	-50°C to +350°C (-58°F to 662°F)
Temperature Accuracy:	±1 °C ±0.5 % of reading (±1.8 °F ± 0.5% of reading)
Temperature Repeatability:	±0.2 °C (±0.36 °F)
Ambient Temperature	-40 to 131°F (-40 to +55°C)
Output	4-20 mA and Pulse/Frequency , Optional: HART or Modbus RS485 Pulse Output: 0 to 10 kHz, 0.001%F.S; Current Output: 4 to 20mA, 0.005%F.S
Electronics	Direct Mount or Remote Mount
Graphic Display	OLED
Operating Elements	3 optical keys for operator
Electromagnetic compatibility	Criteria A, complied with IEC 61000-4-2
Power Supply	85 to 265 VAC, 18 to 36 VDC
IP	Standard IP65, IP67 for options

- Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
- The specifications refer to standard conditions (for further information see Series Manual).

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

## FLOW RANGE

Model: Daniel® M-Type Coriolis

Size: from 1/8 to 10 inches

### FLOW RANGE FOR LIQUIDS (METRIC UNIT IN KG/HR)

**FLOW RANGE FOR LIQUIDS (METRIC UNITS IN KG/HR) TABLE 1.1**

Size (inch)	Full flow range, kg/hr	Accuracy flow range, kg/hr		Zero stability, kg/hr
		+/-0.1%	+/-0.2% and +/-0.5%	
1/8"	1.2–120	10–120	6–120	0.004
3/8"	10 – 1,000	100 – 1,000	50 – 1,000	0.045
1/2"	20 – 3,000	300 – 3,000	150 – 3,000	0.09
1"	80 – 8,000	600 – 8,000	300 – 8,000	0.25
1 1/2"	240 – 32,000	2,400 – 32,000	1,000 – 32,000	1
2"	500 – 50,000	5,000 – 50,000	2,000 – 50,000	2
3"	800 – 120,000	10,000 – 120,000	6,000 – 120,000	3.5
4"	1,500 – 200,000	20,000 – 200,000	10,000 – 200,000	7
6"	5,000 – 500,000	50,000 – 500,000	30,000 – 500,000	23
8"	10,000 – 1,000,000	70,000 – 1,000,000	50,000 – 1,000,000	45
10"	15,000 – 1,500,000	150,000 – 1,500,000	75,000 – 1,500,000	70

### FLOW RANGE FOR LIQUIDS (US UNIT IN LB/HR)

**FLOW RANGE FOR LIQUIDS (US UNITS IN LB/HR) TABLE 1.2**

Size (inch)	Full flow range, lb/hr	Accuracy flow range, lb/hr		Zero stability, lb/hr
		+/-0.1%	+/-0.2% and +/-0.5%	
1/8"	2 – 265	22 – 265	13 – 265	0.0088
3/8"	22 – 2,204	220.40 – 2,204	110 – 2,204	0.099
1/2"	44 – 6,613	661.30 – 6,613	330 – 6,613	0.2
1"	176 – 17,636	1322 – 17,636	661 – 17,636	0.55
1 1/2"	529 – 52,910	5,291 – 52,910	2,204 – 52,910	2.2
2"	1,102 – 110,231	11,023 – 110,231	4,409 – 110,231	4.41
3"	1,767 – 264,555	22,046 – 264,555	13,227 – 264,555	7.72
4"	3306 – 440,925	44,092 – 440,925	22,046 – 440,925	15.43
6"	11,023 – 1,102,311	110,231 – 1,102,311	6,6138 – 1,102,311	50.71
8"	22,046 – 2,204,622	220,462 – 2,204,622	110,231 – 2,204,622	99.21
10"	33,069 – 3,307,000	330,693 – 3,307,000	165,346 – 3,307,00	154.32

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

Model: Daniel® S-Type Coriolis

Size: from 1 to 4 inches

## FLOW RANGE FOR LIQUIDS (METRIC UNIT IN KG/HR)

**FLOW RANGE FOR LIQUIDS (METRIC UNITS IN KG/HR) TABLE 1.3**


Size (inch)	Full flow range, kg/h	Accuracy flow range, kg/h		Zero stability, kg/h
		+/-0.1%	+/-0.2% and +/-0.5%	
1"	80 - 10000	600 - 10000	300 - 10000	0.25
1 1/2"	240 - 24000	2400 - 24000	1000 - 24000	1
2"	500 - 50000	5000 - 50000	2000 - 50000	2
3"	800 - 150000	10000 - 150000	6000 - 150000	3.5
4"	1500 - 200000	20000 - 200000	10000 - 200000	7

## FLOW RANGE FOR LIQUIDS (US UNIT IN LB/HR)

**FLOW RANGE FOR LIQUIDS (METRIC UNITS IN LB/HR) TABLE 1.4**

Size (inch)	Full flow range, lb/h	Accuracy flow range, lb/h		Zero stability, lb/h
		+/-0.1%	+/-0.2% and +/-0.5%	
1"	176 - 22046	1323 - 22046	661 - 22046	0.55
1 1/2"	529 - 52911	5291 - 52911	2205 - 52911	2.2
2"	1102 - 110231	11023 - 110231	4409 - 110231	4.41
3"	1764 - 330693	22046 - 330693	13228 - 330693	7.72
4"	3307 - 440925	44092 - 440925	22046 - 440925	15.43

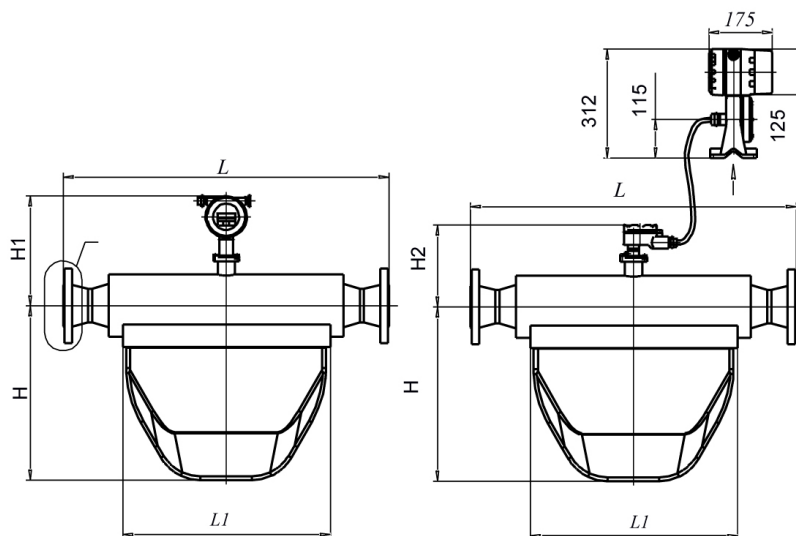

**M-TYPE CORIOLIS INSTALLATION DIMENSIONS (A.2.1 AND A.2.2)**

Compact version - Figure A.2.1 (Daniel® M-Type)

Remote version - Figure A.2.2 (Daniel® M-Type)


**TABLE 1.5 – OUTLINE DIMENSIONS AND WEIGHTS**

Process connection size	L, in MM		L1, in mm	H, in mm	H1, in mm	H2, in mm	Cmax, in MM*	Weight, lb KG	
	≤300# (4 MPa)	≥600# (6.3 MPa)						A.2.1	A.2.2
1/8" (Dn3mm)	12.64 321	13.58 345	88.98 2260	4.53 115	9.84 250	6.69 170	3.23 82	11.02 5	17.64 8
3/8" (Dn10mm)	16.69 424	19.06 484	11.89 302	6.06 154	10.63 270	7.28 185	4.33 110	22.05 10	28.66 13
1/2" (Dn15mm)	15.75 400	16.30 414	11.02 280	7.52 191	11.73 298	8.39 213	4.53 115	24.25 11	30.86 14
1" (Dn25mm)	19.69 500	21.1 536	14.17 360	10.16 258	11.89 302	8.58 218	5.91 150	33.07 15	39.68 18
1 1/2" (Dn40mm)	23.62 600	24.96 634	18.11 460	12.05 306	12.4 315	9.06 230	6.5 165	61.73 28	68.34 31
2" (Dn50mm)	31.5 800	31.6 828	25.2 640	16.14 410	12.8 325	9.45 240	8.07 205	105.82 48	112.44 51
3" (Dn80mm)	35.43 900	36.54 928	27.56 700	19.49 495	13.78 350	10.43 265	16.38 416	213.85 97	220.46 100
4" (Dn100mm)	44.49 1130	45.51 1156	33.86 860	26.18 665	14.57 370	11.22 285	17.32 440	586.43 266	593.04 269
6" (Dn150mm)	57.09 1450	58.66 1490	47.24 1200	35.63 905	15.75 400	12.44 316	21.06 535	1014.13 460	1020.74 463
8" (Dn200mm)	70.87 1800	72.64 1845	57.09 1450	46.25 1175	16.77 426	13.46 342	22.83 580	1146.4 520	1153.02 523
10" (Dn250)	77.4 1966	78.98 2006	60.24 1530	51.18 1300	18.43 468	15.08 383	23.62 600	1278.68 580	1285.29 583



**NOTES**

ANSI B16.5 flanges • 150lb - 300lb dimensions complied with DIN PN16; PN25' and PN40, 600lb dimensions complied with DIN PN63

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

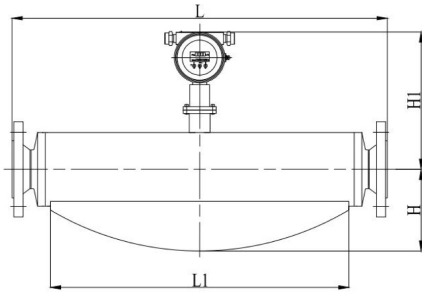**S-TYPE CORIOLIS INSTALLATION DIMENSIONS (A3.1 AND A3.2)**

Compact version - Figure A.3.1 (Daniel® S-Type)

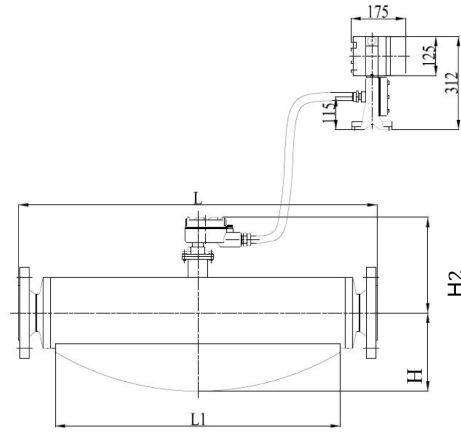

Remove version - Figure A.3.2 (Daniel® S-Type)

**TABLE 1.6 – OUTLINE DIMENSIONS AND WEIGHTS**

Size	L - in - mm		L1 in mm	H in mm	S in mm	H1		
	DIN 2501 (Mpa)					ΔL	Compact in mm	Remote in mm
	OR					(mm)		
	ANSI B16.5							
	≤4.0	≥6.3				±ΔL		
	or	600LB						
	300LB							
1" (Dn25mm)	17.32 440	18.5 470	±4	11.42 290	5.71 145	2.76 70	12.44 316	8.58 218
1-1/2" (Dn40mm)	21.65 550	23.62 600		15.35 390	6.06 154	3.07 78	12.95 329	9.13 232
2 inch (Dn50mm)	31.5 800	32.83 834		23.15 588	7.87 200	4.02 102	13.58 345	9.84 250
3 inch (Dn80mm)	36.81 935	38.31 973		28.74 730	7.87 200	5.51 140	14.57 370	10.63 270
4 inch (Dn100mm)	44.49 1130	46.54 1182	±5	34.25 870	10.83 275	9.61 244	15.16 385	11.42 290

FIGURE A.4 OVERALL DIMENSIONS AND CONNECTION SIZE OF ELECTRONIC UNIT OF REMOTE TYPE


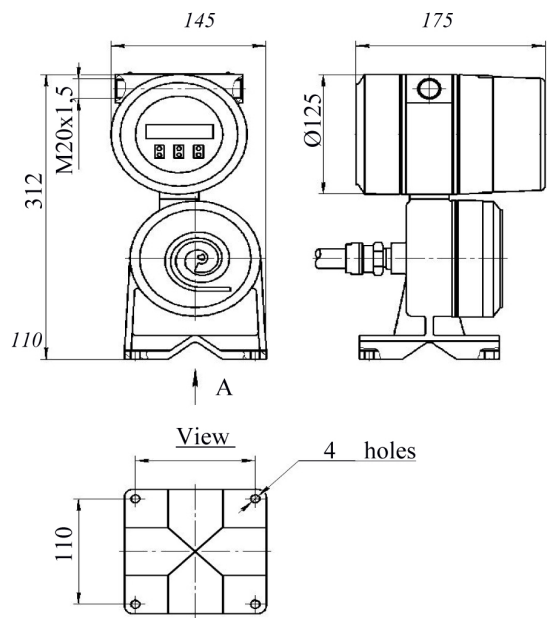


FIGURE A.5 BRACKET FOR FIXING REMOTE TYPE ELECTRONIC UNIT ON THE ASSEMBLY STAND



※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

## TRANSMITTER OPTIONS

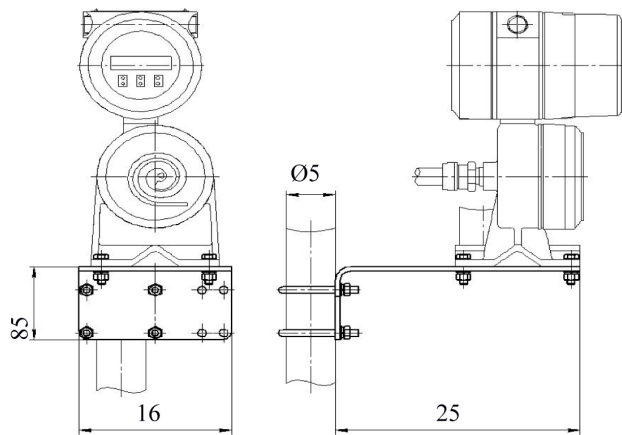

- Direct Mount or Remote Mount
- OLED Display with 3 Optical Keys
- Power Supply: 85-265 VAC or 18-36 VDC
- Outputs: 4-20 mA & Pulse/Frequency
- Optional Communication: HART or Modbus RS485

## AVAILABLE SENSOR TYPES

**M-Type Coriolis****Size from 1/8" to 10"**

The **M-Type Coriolis** features two V-shaped tubes housed in a casing with a significantly smaller radius compared to conventional U-shaped Coriolis sensors. This compact design reduces pressure loss and provides a space-saving installation footprint, making it ideal for applications where low-pressure drop and minimal space are critical.

**S-Type Coriolis****Size: 1" to 4"**

The **S-Type Coriolis** features two tubes with reduced curvature, resulting in a significantly smaller radius compared to conventional M-shaped Coriolis sensors. This compact design reduces installation space requirements, making it ideal for processes where footprint is a critical factor.

## ORDERING CODES

Please provide the following information when placing your order:

Ordering Model	Fluid Name	Flange Type	Temperature	Process Pressure
----------------	------------	-------------	-------------	------------------

### MODEL SELECTION

Daniel® Series Coriolis mass flow meter				
COR	-			Description
1/8"	18			Sensor Size
3/8"	38			
1/2"	05			
1"	01			
1 ½"	15			
2"	02			
3"	03			
4"	04			
6"	06			
8"	08			
10"	10			
M-Type Coriolis		M	Sensor Type	
S-Type Coriolis		S		
Liquid		L	Medium	
Gas		G		
DIN PN16 16 BAR MWP		D16	Flange Rating / Maximum Working Pressure	
DIN PN25 25 BAR MWP		D25		
DIN PN40 40 BAR MWP		D40		
DIN PN63 63 BAR MWP		D63		
DIN PN100 100 BAR MWP		D10		
DIN PN160 160 BAR MWP		D60		
DIN PN250 250 BAR MWP		D50		
ANSI 150#RF 285 PSI MWP		A15		
ANSI 300#RF 740 PSI MWP		A30		
ANSI 600#RF 1,480 PSI MWP		A60		
ANSI 900#RF 2,220 PSI MWP		A90		
ANSI 1500#RF 3,705 PSI MWP		A50		
JIS 10K		10K		
JIS 30K		30K		
Sanitary fitting connection		SFC		
Customized connection		CSC		

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

## MODEL SELECTION (CONTINUED)

Daniel® Series Coriolis mass flow meter									
Compact version -58°F to +257°F (-50°C to +125°C)	COM								Structures
Remote version -58°F to +392°F (-50°C to +200°C)	REM								
Remote version -58°F to +572°F (-50°C to +300°C)	RXM								
Not for hazardous application		NX							Explosion Proof
UL approved for class I, Div. 1 Groups B, C and D		UL							
ATEX and IECEx approved for II 2G Exdb ib IIA/IIB*IIC T*Gb		AX							
DC18 to 36V			1						Power Supply
AC85 to 265V			2						
Modbus RTU(RS485) + one active 4-20mA + one active pulse/frequency, standard				R					Signal Output
HART + one active 4-20mA + one active pulse/frequency				H					
2* active 4-20mA + active pulse				S					
Modbus RTU(RS485) + 2* active 4-20mA + one active pulse/frequency				D					
+/- 0.1% of RD					1				Accuracy
+/- 0.2% of RD					2				
+/- 0.5% of RD					5				
Metric unit programming						M			Software Version
US unit programming						U			
Tubes 316SS and 304 SS Housing case (Non-Wetted Parts)							304		Material
All 316 SS (Tubes + Housing case)							316		
Hastelloy C							HAS		
Same as Sensor								0	Process Connection Size
One size Up from Sensor								1	

※ Specifications are subject to change without notice. Users should confirm with the manufacturer that the specifications are current before use. The manufacturer assumes no responsibility for the application of specifications that have been updated or are no longer valid.

## AGENCY CERTIFICATIONS FOR THE CORIOLIS

### AGENCY CERTIFICATIONS FOR AGENCY CERTIFICATIONS FOR CORIOLIS MASS FLOW METERS

Certification type		Description	Certificate
Electrical	UL and CUL	Class 1 Division 1 Groups B, C, and D	E360841 vol. 1
Metrology		NTEP	25-067

With over 90 years of experience, Daniel is the only manufacturer that has the knowledge and experience to engineer and offer superior products that are trusted to provide the most reliable and accurate measurements in the global oil and gas industry.

**Contact Us**

Email: [sales@Daniel.com](mailto:sales@Daniel.com)

Phone: +1 (346) 509-3700

[www.Daniel.com](http://www.Daniel.com)

